DATI TECNICI
TECHNICAL DATA

serie / series **E192-2S**




Motoriduttore epicicloidale
Soppressione disturbi motore con VDR e condensatori
Albero di uscita supportato da due cuscinetti a sfere
Massimo carico radiale: 200N
(a 10mm dalla flangia di fissaggio)
Massimo carico assiale: 100N
Direzione di rotazione secondo polarità
Può essere montato in ogni posizione
Temperatura di esercizio: -20°C/60°C
Peso approssimativo: 385/480g

Planetary gear-motor
Motor interference suppression by VDR and capacitors
Outgoing shaft two ball bearings supported
Maximum radial shaft load: 200N
(10 mm from the fixing flange)
Maximum axial shaft load: 100N
Direction of rotation depending on polarity
Can be mounted in any position
Temperature working range: -20°C/60°C
Approx weight: 385/480g

Valori tipici a temperatura ambiente +20° — *Typical values at ambient temperature +20°*
Tolleranza +/- 10% — *Tolerance +/- 10%*

TIPO *TYPE*	TENSIONE NOMINALE *NOMINAL VOLTAGE*	L	RAPPORTO :1 *RATIO TO:1*	COPPIA MASSIMA *MAXIMUM TORQUE*	VELOCITÁ *SPEED*		CORRENTE *CURRENT*		POTENZA ASSORBITA CON MAX COPPIA *INPUT POWER AT MAX TORQUE*
					SENZA CARICO *NO LOAD*	CON MAX COPPIA *AT MAX TORQUE*	SENZA CARICO *NO LOAD*	CON MAX COPPIA *AT MAX TORQUE*	
	v	mm		Ncm	rpm		A		W
E192-2S· 12/24 ·3	12/24	86	3,66	15	1100/1100	700/770	<0,4/<0,2	1,70/0,96	20,4/23
E192-2S· 12/24 ·5	12/24	86	5	20	800/830	510/575	<0,4/<0,2	1,75/0,95	21/22,8
E192-2S· 12/24 ·13	12/24	93	13,44	45	300/300	200/225	<0,4/<0,2	1,65/0,85	19,8/20,4
E192-2S· 12/24 ·18	12/24	93	18,33	60	218/226	155/170	<0,4/<0,2	1,65/0,84	19,8/20,2
E192-2S· 12/24 ·25	12/24	93	25	90	160/166	105/118	<0,4/<0,2	1,75/0,88	21/21,1
E192-2S· 12/24 ·49	12/24	100	49,29	160	82/82	58/60	<0,4/<0,2	1,60/0,85	19,2/20,4
E192-2S· 12/24 ·67	12/24	100	67,22	220	59,5/61,5	40/45	<0,4/<0,2	1,80/0,88	21,6/21,1
E192-2S· 12/24 ·91	12/24	100	91,66	270	43,6/45	31/34	<0,4/<0,2	1,70/0,85	20,4/20,4
E192-2S· 12/24 ·125	12/24	100	125	300	32/33	24/26	<0,4/<0,2	1,32/0,64	15,9/15,4
E192-2S· 12/24 ·180	12/24	107	180,75	220	22/22	20/20	<0,4/<0,2	0,75/0,42	9/10,1
E192-2S· 12/24 ·246	12/24	107	246,48	300	15,2/16,8	14,5/15	<0,4/<0,2	0,87/0,43	10,5/10,3
E192-2S· 12/24 ·336	12/24	107	336,11	300	11,9/12,3	11/11,5	<0,4/<0,2	0,69/0,34	8,3/8,2
E192-2S· 12/24 ·458	12/24	107	458,3	300	9/9,5	8,5/9	<0,4/<0,2	0,54/0,28	6,5/6,7
E192-2S· 12/24 ·625	12/24	107	625	300	6,4/6,6	6/6,2	<0,4/<0,2	0,46/0,23	5,5/5,5

E192-2S

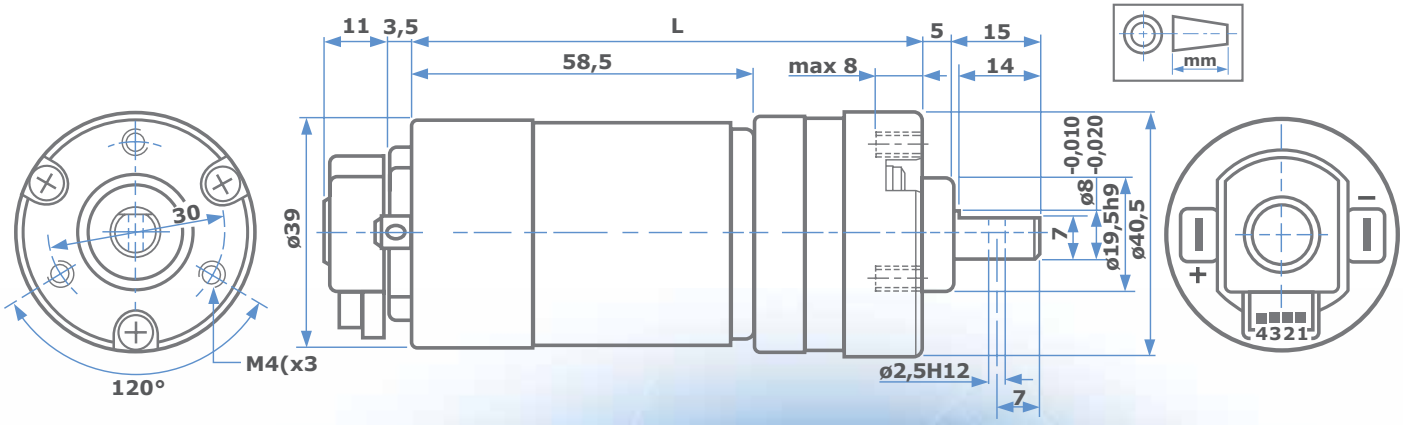

micro motors s.r.l.
Via Piave, 80/82 - 23879 VERDERIO (LC) ITALY
Tel. 039.510611/039.510499
www.micromotors.eu - info@micromotors.eu

motoriduttori con encoder ad effetto Hall bifase a 90°

gear-motors with two-phase Hall-effect 90° encoder

MAGNETE A SEI POLI:
TRE IMPULSI OGNI GIRO MOTORE

La successione delle fasi A-B si ottiene collegando il motore secondo le polarità stampigliate sul fondello.

INTERRUTTORE AD EFFETTO HALL

Questi interruttori ad effetto Hall, sono sensori altamente stabili termicamente e resistenti alle sollecitazioni meccaniche, sono maggiormente utilizzati in applicazioni dove il campo magnetico varia rapidamente il valore di campo residuo è basso.
Ciascun dispositivo include un regolatore di tensione, un generatore di Hall, un circuito stabilizzatore di temperatura, un amplificatore di segnale stabilizzato a chopper, un comparatore di Schmitt ed un mosfet a drain aperto, compresi su un solo "chip" di silicio.
Il regolatore di tensione permette di alimentare il dispositivo con tensione compresa tra 3,5 e 24V.
Il mosfet di uscita può sopportare correnti di 20mA massimo. Con opportuno valore di resistenza di carico in uscita può essere agevolmente interfacciato con logiche bipolari o MOS.

SIX POLES MAGNET:
THREE PULSES FOR MOTOR TURN


The sequence of the phases A-B is obtained connecting the motor with the polarities printed on the black bottom cover.

HALL-EFFECT SWITCHES

These Hall-effect switches are highly temperature stable and stress-resistant sensors best utilized in applications that provide steep magnetic slopes and low residual levels of magnetic flux density. Each device includes a voltage regulator, quadratic Hall voltage generator, temperature stability circuit, signal Schmitt chopper stabilized amplifier, Schmitt trigger and an open drain mosfet on a single silicon chip.
The on-board regulator permits operation with supply voltages of 3,5 to 24V. The output mosfet can sink up to 20 mA with suitable output pull up, they can be used directly with bipolar or MOS logic circuits.

collegamenti

1 Verde: GND
2 Giallo: O.C. B NPN
3 Blu: O.C. A NPN
4 Marrone: Vcc (Hall)



connections

1 Green: GROUND
2 Yellow: O.C. B NPN
3 Blue: O.C. A NPN
4 Brown: Vcc (Hall)



ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	VALUE	UNITS
Supply Voltage	VDD	28	V
Supply Current	IDD	50	mA
Output Voltage	VOUT	28	V
Output Current	IOUT	50	mA
Storage Temperature Range	TS	-50 to 150	°C
Maximimum Junction Temperature	TJ	165	°C

Exceeding the absolute maximum ratings may cause permanent damage. Exposure to all absolute-maximum-rated conditions for extended periods may affect device reliability.

GENERAL ELECTRICAL SPECIFICATIONS

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYPE	MAX	UNITS
Supply Voltage	VDD	Operating	3,5	-	24	V
Supply Current	IDD	B<BRP	-	-	5	mA
Output Saturation Voltage	VDSon	IOUT=20mA, B>BOP	-	-	0,5	V
Output Leakage Current	IOFF	IB<BRP, VOUT=24V	-	0,3	10	µA
Output Rise Time	tr	RL=1kΩ, CL=20pF	-	0,25	-	µs
Output Fall Time	tr	RL=1kΩ, CL=20pF	-	0,25	-	µs

OC Operating Parameters TA = 25 C°, VDD = 3,5V to 24V (unless otherwise specified)

micro motors s.r.l.
Via Piave, 80/82 - 23879 VERDERIO (LC) ITALY
Tel. 039.510611/039.510499
www.micromotors.eu - info@micromotors.eu