DATI TECNICI
TECHNICAL DATA

serie / series **RH158-2S**



Soppressione disturbi con VDR sul collettore
Direzione di rotazione secondo polarità
Può essere montato in ogni posizione
Massimo carico radiale: 50N
Massimo carico assiale: 10N
Temperatura di esercizio: -20°C/60°C
Peso approssimativo: 190g


VDR interference suppression on the collector
Direction of rotation depending on polarity
Can be mounted in any position
Maximum radial shaft load: 50N
Maximum axial shaft load: 10N
Temperature range: -20°C/60°C
Approx weight: 190g

Valori tipici a temperatura ambiente +20°
Tolleranza +/- 10%

Typical values at ambient temperature +20°
Tolerance +/- 10%

TIPO *TYPE*	TENSIONE NOMINALE *NOMINAL VOLTAGE*	L	RAPPORTO :1 *RATIO TO:1*	COPPIA MASSIMA *MAXIMUM TORQUE*	VELOCITÁ *SPEED*		CORRENTE *CURRENT*	
					SENZA CARICO *NO LOAD*	CON MAX COPPIA *AT MAX TORQUE*	SENZA CARICO *NO LOAD*	CON MAX COPPIA *AT MAX TORQUE*
	v	mm		Ncm	rpm		mA	
RH158-2S-12/24-15	12/24	64	14,14	10	440	300	<140 <70	660 330
RH158-2S-12/24-30	12/24	64	29,75	20	210	140	<140 <70	660 330
RH158-2S-12/24-75	12/24	66,5	76,84	50	81	55	<140 <70	680 340
RH158-2S-12/24-100	12/24	66,5	94,37	60	66	45	<140 <70	680 340
RH158-2S-12/24-200	12/24	69	198,5	100	33	23	<140 <70	580 290
RH158-2S-12/24-250	12/24	69	243,8	100	26	21	<140 <70	500 250
RH158-2S-12/24-510	12/24	72	512,85	100	12	10,5	<140 <70	300 150
RH158-2S-12/24-630	12/24	72	629,82	100	10	9	<140 <70	270 135

RH158-2S

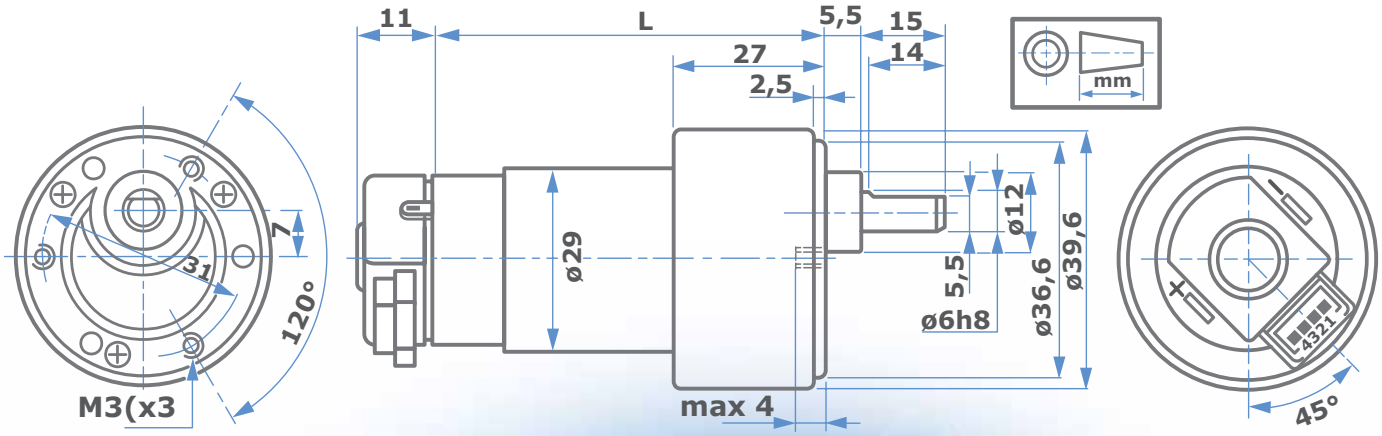

RH158-2S

micromotors s.r.l.
Via Piave, 80/82 - 23879 VERDERIO (LC) ITALY
Tel. 039.510611/039.510499
www.micromotors.eu - info@micromotors.eu

motoriduttori con encoder ad effetto Hall bifase a 90°

gear-motors with two-phase Hall-effect 90° encoder

MAGNETE A SEI POLI:
TRE IMPULSI OGNI GIRO MOTORE

La successione delle fasi A-B si ottiene collegando il motore secondo le polarità stampigliate sul fondello.

INTERRUTTORE AD EFFETTO HALL

Questi interruttori ad effetto Hall, sono sensori altamente stabili termicamente e resistenti alle sollecitazioni meccaniche, sono maggiormente utilizzati in applicazioni dove il campo magnetico varia rapidamente il valore di campo residuo è basso.
Ciascun dispositivo include un regolatore di tensione, un generatore di Hall, un circuito stabilizzatore di temperatura, un amplificatore di segnale stabilizzato a chopper, un comparatore di Schmitt ed un mosfet a drain aperto, compresi su un solo "chip" di silicio.
Il regolatore di tensione permette di alimentare il dispositivo con tensione compresa tra 3,5 e 24V.
Il mosfet di uscita può sopportare correnti di 20mA massimo. Con opportuno valore di resistenza di carico in uscita può essere agevolmente interfacciato con logiche bipolari o MOS.

SIX POLES MAGNET:
THREE PULSES FOR MOTOR TURN


The sequence of the phases A-B is obtained connecting the motor with the polarities printed on the black bottom cover.

HALL-EFFECT SWITCHES

These Hall-effect switches are highly temperature stable and stress-resistant sensors best utilized in applications that provide steep magnetic slopes and low residual levels of magnetic flux density. Each device includes a voltage regulator, quadratic Hall voltage generator, temperature stability circuit, signal Schmitt chopper stabilized amplifier, Schmitt trigger and an open drain mosfet on a single silicon chip.
The on-board regulator permits operation with supply voltages of 3,5 to 24V. The output mosfet can sink up to 20 mA with suitable output pull up, they can be used directly with bipolar or MOS logic circuits.

collegamenti

1 Verde: GND
2 Giallo: O.C. B NPN
3 Blu: O.C. A NPN
4 Marrone: Vcc (Hall)



connections

1 Green: GROUND
2 Yellow: O.C. B NPN
3 Blue: O.C. A NPN
4 Brown: Vcc (Hall)



ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	VALUE	UNITS
Supply Voltage	VDD	28	V
Supply Current	IDD	50	mA
Output Voltage	VOUT	28	V
Output Current	IOUT	50	mA
Storage Temperature Range	TS	-50 to 150	°C
Maximimum Junction Temperature	TJ	165	°C

Exceeding the absolute maximum ratings may cause permanent damage. Exposure to all absolute-maximum-rated conditions for extended periods may affect device reliability.

GENERAL ELECTRICAL SPECIFICATIONS

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYPE	MAX	UNITS
Supply Voltage	VDD	Operating	3,5	-	24	V
Supply Current	IDD	B<BRP	-	-	5	mA
Output Saturation Voltage	VDSon	IOUT=20mA, B>BOP	-	-	0,5	V
Output Leakage Current	IOFF	IB<BRP, VOUT=24V	-	0,3	10	µA
Output Rise Time	tr	RL=1kΩ, CL=20pF	-	0,25	-	µs
Output Fall Time	tr	RL=1kΩ, CL=20pF	-	0,25	-	µs

OC Operating Parameters TA = 25 C°, VDD = 3,5V to 24V (unless otherwise specified)

micro motors s.r.l.
Via Piave, 80/82 - 23879 VERDERIO (LC) ITALY
Tel. 039.510611/039.510499
www.micromotors.eu - info@micromotors.eu